

| RATINGS 400 V - 50 Hz |     |     |
|-----------------------|-----|-----|
| Standby               | kVA | 165 |
|                       | kWe | 132 |
| Prime                 | kVA | 150 |
|                       | kWe | 120 |



### Benefits & features

#### KOHLER premium quality

- Design offices using the latest technical innovations
- Modern fully certified factories
- A cutting edge laboratory
- The generating set, its components and a wide range of options have been fully developed, prototype tested, factory built, and production tested
- Approved for use with HVO (Hydrotreated Vegetable Oil) according to EN15940

#### KOHLER premium performances

- Optimized and certified sound levels
- Reliable power, even in extreme conditions
- Optimized fuel consumption
- Compact footprint
- Best quality of electricity, high starting and loading capacity, according to ISO8528-5
- Robust base frames and high-quality enclosures
- Protection of installations and people
- Approved in line with the most stringent standards

#### Engines

- Premium level engines, in-house or from strong partners
- High power density, small footprint
- Low temperature starting capability
- Long maintenance interval

#### Alternator

- Provide industry leading motor starting capability
- Made in Europe
- Built with a class H insulation and IP23

#### Cooling

- A compact and complete solution using a mechanically driven radiator fan
- Designed or optimized by KOHLER
- High temperature and altitude product capacity available

#### Base frame and enclosure

- High quality steel with enhanced corrosion resistance
- Highly durable QUALICOAT-certified epoxy paint
- Minimum 1000 hours of resistance to salt spray in accordance with ISO12944
- Ergonomic access to allow easy maintenance and connection of the generator
- Robust design optimized for transportation

### GENERAL SPECIFICATIONS

|                                   |                               |
|-----------------------------------|-------------------------------|
| Engine brand                      | JOHN DEERE                    |
| Alternator commercial brand       | KOHLER                        |
| Voltage (V)                       | 400/230                       |
| Standard Control Panel            | APM303                        |
| Optional control panel            | APM403                        |
| Optional Control Panel            | M80                           |
| Optional control panel            | Terminal block                |
| Consumption @ 100% load ESP (L/h) | 36                            |
| Consumption @ 100% load PRP (L/h) | 33                            |
| Emission level                    | Fuel consumption optimization |
| Type of Cooling                   | Mechanical driven fan         |
| Performance class                 | G3                            |

### GENERATOR SETS RATINGS

|       | Voltage | PH | Hz | Standby Rating |     |      | Prime Rating |     |
|-------|---------|----|----|----------------|-----|------|--------------|-----|
|       |         |    |    | kWe            | kVA | Amps | kWe          | kVA |
| KD165 | 415/240 | 3  | 50 | 132            | 165 | 230  | 120          | 150 |
|       | 400/230 | 3  | 50 | 132            | 165 | 238  | 120          | 150 |
|       | 380/220 | 3  | 50 | 132            | 165 | 251  | 120          | 150 |
|       | 240 TRI | 3  | 50 | 132            | 165 | 397  | 120          | 150 |
|       | 230 TRI | 3  | 50 | 132            | 165 | 414  | 120          | 150 |
|       | 220 TRI | 3  | 50 | 132            | 165 | 433  | 120          | 150 |

### DIMENSIONS COMPACT VERSION

|                   |      |
|-------------------|------|
| Length (mm)       | 2497 |
| Width (mm)        | 1103 |
| Height (mm)       | 1524 |
| Tank capacity (L) | 334  |
| Dry weight (kg)   | 1375 |

### DIMENSIONS SOUNDPROOFED VERSION

|   |               |
|---|---------------|
| Type soundproofing                                  | NOT AVAILABLE |
| Length (mm)   | 3590          |
| Width (mm)  | 1145          |
| Height (mm)   | 1775          |
| Tank capacity (L)                                   | 334           |
| Dry weight (kg)                                     | 2065          |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 81            |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 70            |

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.

| Engine                                     |                               |            |            |
|--|-------------------------------|------------|------------|
| <b>General</b>                             |                               |            |            |
| Engine brand                               | JOHN DEERE                    |            |            |
| Engine ref.                                | 6068HFG20-153 *               |            |            |
| Air inlet system                           | Turbo                         |            |            |
| Fuel                                       | Diesel Fuel/HVO               |            |            |
| Emission level                             | Fuel consumption optimization |            |            |
| Cylinder configuration                     | L                             |            |            |
| Number of cylinders                        | 6                             |            |            |
| Displacement (l)                           | 6.72                          |            |            |
| Bore (mm) * Stroke (mm)                    | 106 * 127                     |            |            |
| Compression ratio                          |                               |            |            |
| Speed 50Hz (RPM)                           | 1500                          |            |            |
| Maximum stand-by power at rated RPM (kW)   | 155                           |            |            |
| Charge Air coolant                         | Air/Air                       |            |            |
| Injection Type                             | Direct                        |            |            |
| Governor type                              | Mechanical                    |            |            |
| Air cleaner type, models                   | Dry                           |            |            |
| <b>Fuel system</b>                         |                               |            |            |
| Maximum fuel pump flow (l/h)               | 108                           |            |            |
| Max head on fuel return line (m)           | 1.20                          |            |            |
| <b>Consumption with cooling system</b>     |                               |            |            |
| Fuel consumption @ ESP Max Power (l/h)     | 37                            |            |            |
| Fuel consumption @ PRP Max Power (l/h)     | 33.80                         |            |            |
| Fuel consumption @ 75% of PRP Power (l/h)  | 26.10                         |            |            |
| Fuel consumption @ 50% of PRP Power (l/h)  | 17.70                         |            |            |
| <b>Emissions</b>                           |                               |            |            |
| Emission PM (mg/Nm3) 5% O2                 | 103.4                         |            |            |
| Emission CO (mg/Nm3) 5% O2                 | 266                           |            |            |
| Emission NOx (mg/Nm3) 5% O2                | 3147                          |            |            |
| Emission HC (mg/Nm3) 5% O2                 | 37                            |            |            |
| <b>Lubrication System</b>                  |                               |            |            |
| Oil system capacity including filters (l)  | 21,50                         |            |            |
| Min. oil pressure (bar)                    | 1                             |            |            |
| Max. oil pressure (bar)                    | 5                             |            |            |
| Oil sump capacity (l)                      | 20.60                         |            |            |
| Oil consumption 100% ESP 50Hz (l/h)        | 0.0910                        |            |            |
| <b>Air Intake system</b>                   |                               |            |            |
| Max. intake restriction (mm H2O)           | 625                           |            |            |
| Combustion air flow (l/s)                  | 170                           |            |            |
| <b>Exhaust system</b>                      |                               |            |            |
|  |                               | <b>PRP</b> | <b>ESP</b> |
| Heat rejection to exhaust (kW)             |                               |            | 99         |
| Exhaust gas temperature (°C)               |                               |            | 555        |
| Exhaust gas flow (L/s)                     |                               |            | 346.70     |
| Max. exhaust back pressure (mm H2O)        | 750                           |            |            |
| <b>Cooling system</b>                      |                               |            |            |
| Radiator & Engine capacity (l)             | 25.80                         |            |            |
| Fan power 50Hz (kW)                        | 7.70                          |            |            |
| Fan air flow w/o restriction (m3/s)        | 3.50                          |            |            |
| Available restriction on air flow (mm H2O) | 20                            |            |            |
| Type of coolant                            | Glycol-Ethylene               |            |            |
| Radiated heat to ambient (kW)              | 16                            |            |            |
| Heat rejection to coolant HT (kW)          | 55                            |            |            |
| HT circuit flow rate (l/min)               | 144                           |            |            |
| Coolant capacity HT, engine only (l)       | 11.30                         |            |            |
| Max coolant temperature, Shutdown (°C)     | 105                           |            |            |
| Thermostat begin of opening HT (°C)        | 82                            |            |            |
| Thermostat end of opening HT (°C)          | 94                            |            |            |

\* Engine reference may be partially modified depending on genset application, options selected by the customer and lead time required.

\*\* Fuel consumption is up to 4% higher when using HVO than Diesel Fuel

### Alternator Specifications

|  |                |
|--|----------------|
| Alternator commercial brand                              | KOHLER         |
| Kohler Alternator description                            | KH01191T       |
| Number of pole   | 4              |
| Number of bearing  | Single Bearing |
| Technology   | Brushless      |
| Indication of protection                                 | IP23           |
| Insulation class   | H              |
| Number of wires  | 06             |
| AVR Regulation   | Yes            |
| Coupling   | Direct         |
| Capacity for maintaining short circuit at 2.7 In for 5 s | Yes            |


### Application data

|   |      |
|---|------|
| Overspeed (rpm)                                   | 2250 |
| Power factor (Cos Phi)                            | 0.80 |
| Voltage regulation at established rating (+/- %)  | 0.50 |
| Wave form : NEMA=TIF                              | <50  |
| Wave form : CEI=FHT                               | <2   |
| Total Harmonic Distortion in no-load DHT (%)      | <3.5 |
| Total Harmonic Distortion, on linear load DHT (%) | <5   |
| Recovery time (Delta U = 20% transient) (ms)      | 500  |

### Performance datas

|                                      |     |
|--------------------------------------|-----|
| Continuous Nominal Rating 40°C (kVA) | 150 |
| Unbalanced load acceptance ratio (%) | 100 |

Peak motor starting (kVA) based on x% voltage dip power factor at 0.3

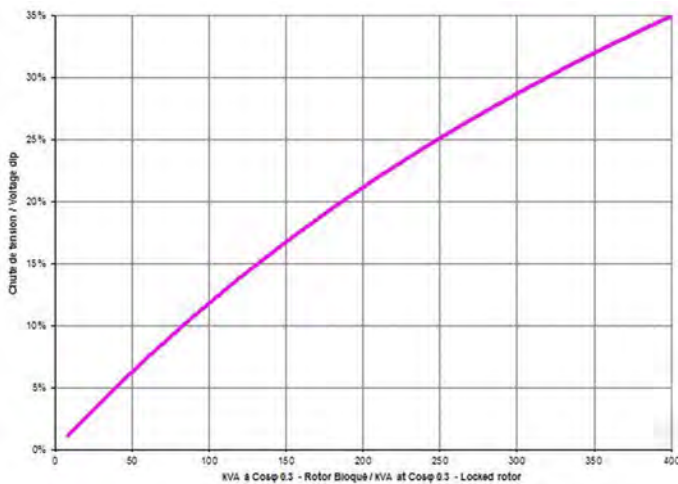

### Alternator Standard Features

- All models are brushless, rotating-field alternators
- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting
- The AVR voltage regulator provides superior short circuit capability
- Self-ventilated and dip proof construction
- Superior voltage waveform

*Note: See Alternator Data Sheets for alternator application data and ratings, efficiency curves, voltage dip with motor starting curves, and short circuit decrement curves.*

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.

### Dimensions compact version

|  |                    |
|--|--------------------|
| Length (mm) * Width (mm) * Height (mm) | 2497 * 1103 * 1524 |
| Dry weight (kg)                        | 1375               |
| Tank capacity (L)                      | 334                |

### M139 - Dimensions soundproofed version

|   |                    |
|---|--------------------|
| Length (mm) * Width (mm) * Height (mm)              | 3590 * 1145 * 1775 |
| Dry weight (kg)                                     | 2065               |
| Tank capacity (L)                                   | 334                |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 81                 |
| Sound power level guaranteed (Lwa) 50Hz (75% PRP)   | 96                 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 70                 |



### Dimensions DW compact version

|  |                    |
|--|--------------------|
| Length (mm) * Width (mm) * Height (mm) | 3560 * 1200 * 1820 |
| Dry weight (kg)                        | 1905               |
| Tank capacity (L)                      | 868                |

### M139 - Dimensions DW soundproofed version

|   |                    |
|---|--------------------|
| Length (mm) * Width (mm) * Height (mm)              | 3590 * 1200 * 2072 |
| Dry weight (kg)                                     | 2590               |
| Tank capacity (L)                                   | 868                |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 81                 |
| Sound power level guaranteed (Lwa) 50Hz (75% PRP)   | 96                 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 70                 |

### M139 - Dimensions DW 48h soundproofed version

|   |                    |
|---|--------------------|
| Length (mm) * Width (mm) * Height (mm)              | 3590 * 1200 * 2366 |
| Dry weight (kg)                                     | 2632               |
| Tank capacity (L)                                   | 1790               |
| Acoustic pressure level @1m in dB(A) 50Hz (75% PRP) | 81                 |
| Sound power level guaranteed (Lwa) 50Hz (75% PRP)   | 96                 |
| Acoustic pressure level @7m in dB(A) 50Hz (75% PRP) | 70                 |

\* dimensions and weight without options

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.

### Basic terminal block



It is used as a basic terminal block for connecting a control unit. Offers the following functions:

- emergency stop button
- customer connection terminal block
- CE certified

### M8



The M80 is a dual-function control panel. It can be used as a basic terminal block for connecting a control unit and as an instrument panel with a direct read facility, with displays giving a global view of your generating set's basic parameters. Offers the following functions:

- Engine parameters: tachometer, working hours counter, coolant temperature indicator, oil pressure indicator
- emergency stop button
- customer connection terminal block
- CE certified

### APM303




The APM303 is a versatile unit which can be operated in manual or automatic mode. It offers the following features:

- Measurements: phase-to-neutral and phase-to-phase voltages, fuel level (In option : active power currents, effective power, power factors, Kw/h energy meter, oil pressure and coolant temperature levels)
- Supervision: Modbus RTU communication on RS485
- Reports: (In option : 2 configurable reports)
- Safety features: Overspeed, oil pressure, coolant temperatures, minimum and maximum voltage, minimum and maximum frequency (Maximum active power P<66kVA)
- Traceability: Stack of 12 stored events

For further information, please refer to the data sheet for the APM303

### APM403



#### BASIC GENERATING SET AND POWER PLANT CONTROL

The APM403 is a versatile control unit which allows operation in manual or automatic mode

- Measurements : voltage and current
- kW/kWh/kVA power meters
- Standard specifications: Voltmeter, Frequency meter.
- Optional : Battery ammeter.
- J1939 CAN ECU engine control
- Alarms and faults: Oil pressure, Coolant temperature, Overspeed, Start-up failure, alternator min/max, Emergency stop button.
- Engine parameters: Fuel level, hour counter, battery voltage.
- Optional (standard at 24V): Oil pressure, water temperature.
- Event log/ Management of the last 300 genset events.
- Mains and genset protection
- Clock management
- USB connections, USB Host and PC,
- Communications : RS485 INTERFACE
- ModBUS protocol /SNMP
- Optional : Ethernet, GPRS, remote control, 3G, 4G,
- Websupervisor, SMS, E-mails

**STANDARD SCOPE OF SUPPLY**

All our gensets are fitted with:

- Industrial water cooled DIESEL engine
- Electric starter & charge alternator
- Standard air filter
- Schneider or ABB electric circuit breaker, adapted to the short-circuit current of the generating set
- Single bearing alternator IP 23 T° rise/ insulation to class H/H
- Welded steel base frame with 85% vibration attenuation mounts
- 4 lifting points on the chassis, lifting bar on the top included from 165 kVA ESP or optional
- highly durable QUALICOAT certified epoxy paint
- frame height optimized to allow it to be moved safely by forklift
- enclosure made of new high-quality European steel with enhanced corrosion resistance
- IP 64 locks, made from stainless materials
- enclosures and base frames tested and analyzed by the French Corrosion Institut
- 100% of tanks tested for permeability
- Personal protection ensured by protective grilles on hot and rotating parts
- Separate 9 dB(A) silencer
- Fuel tank welded inside the genset frame
- Retention bund included for gensets up to 110 kVA ESP
- Charged DC starting battery with electrolyte
- Emergency stop button on the outside
- Flexible fuel lines & lub oil drain cock
- Exhaust outlet with flexible and flanges
- User's manual (1 copy)
- Packing under plastic film
- Delivered with oil and antifreeze liquid

**STANDARD DELIVERY**

All our gensets are fitted with:

- Industrial water-cooled DIESEL engine
- Electric starter & charge alternator
- Standard air filter
- Electric circuit breaker, adapted to the short-circuit current of the generating set
- Single bearing alternator IP 23 T° rise/ insulation to class H/H
- Welded steel base frame with 85% vibration attenuation mounts
- frame height optimized to allow it to be moved safely by forklift
- enclosure made of new high-quality European steel with enhanced corrosion resistance
- enclosures and base frames tested and analyzed by the French Corrosion Institut
- 100% of tanks tested for permeability
- Personal protection ensured by protective grilles on hot and rotating parts
- Separate 9 dB(A) silencer
- Fuel tank welded inside the genset frame
- Retention bund included for gensets up to 250 kVA ESP
- Charged DC starting battery with electrolyte
- Emergency stop button on the outside
- Flexible fuel lines & lub oil drain cock
- Exhaust outlet with flexible and flanges
- User's manual (1 copy)
- Packing under plastic film
- Delivered with oil and antifreeze liquid

**CODES AND STANDARDS**

Engine-generators set is designed and manufactured in facilities certified to standards ISO9001:2015 & ISO14001:2015. The generator sets and its components are prototype-tested, factory built and production tested and are in compliance with the relevant standards:

- Machinery Directive 2006/42/EC of May 17th 2006

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.

- EMC Directive 2014/30/UE
- Safety objectives set out in the Low Voltage Directive 2014/35/UE
- EN ISO 8528-13, EN 60034-1, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 55011, EN 1679-1 et EN 60204-1

**POWER RATINGS DEFINITION** according to ISO8528-1 (2018-02 edition) and ISO-3046-1

**Emergency Standby Power (ESP):** The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Average load factor per 24 hours of operation is <70%.

**Prime Power (PRP):** At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour within 12 hour of operation. Average load factor per 24 hours of operation is <70%.

**TERMS OF USE**

According to the standard, the nominal power assigned by the genset is given for 25°C Air Inlet Temperature, of a barometric pressure of 100 kPA (100 m A.S.L), and 30% relative humidity. For particular conditions in your installation, refer to the derating table.

---

Reference Conditions: 25°C Air Inlet Temperature, 40°C Fuel Inlet Temperature, 100 kPa Barometric Pressure; 10.7 g/kg of dry air Humidity. Intake Restriction set to maximum allowable limit for clean filter; Exhaust Back pressure set to maximum allowable limit.

Data was taken from a single engine test according to the test methods, fuel specification and reference conditions stated above and is subjected to instrumentation and engine-to-engine variability. Test conducted with alternate test methods, instrumentation, fuel or reference conditions can yield different results. Data and specifications subject to change without notice.